


### Vmax<sup>PLUS</sup> FEATURES & BENEFITS:

- Rugged, high quality industrial system reaching a deep vacuum level of 29" HgV
- Minimal maintenance requirements, 10,000+ hours of reliable, efficient vacuum use
- Extremely low operating noise level makes this system desirable in today's workplace
- Compact design, ease of access to interior for maintenance
- Tolerant of carryover of soft solids and/or minimal amounts of liquids without damaging internal parts of the pump
- High-efficiency liquid ring vacuum pump at the heart of the system
- Includes internal scavenge line as standard
- Air-cooled heat exchanger ensures continuous operation over full vacuum range without overheating
- Only system on the market with a full 3-year warranty
- Vmax<sup>PLUS</sup> systems are available in multiplex configurations, stacked upright for space-savings

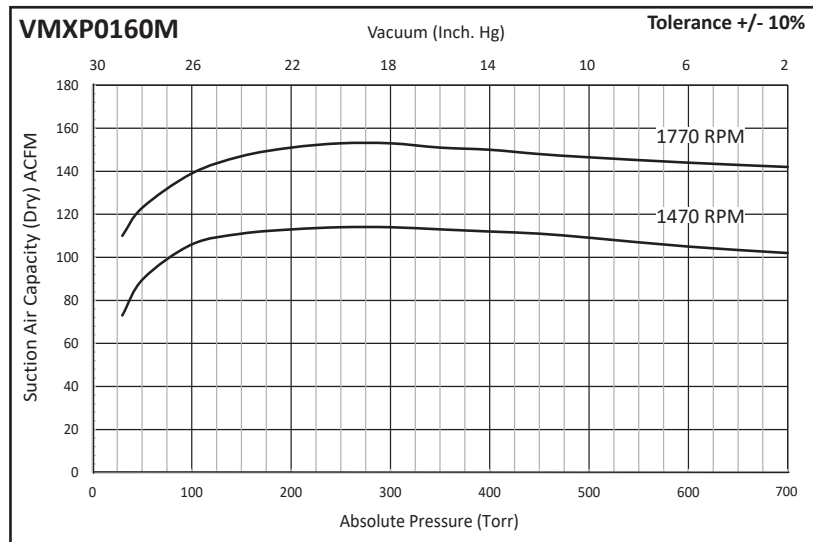


### PERFORMANCE CHARACTERISTICS

Nominal Capacity: 155CFM/263m<sup>3</sup>/hr  
 Motor: 60Hz/10Hp/7.5kW | 50Hz/7.5Hp/5.5kW  
 Speed: 1770/1470 RPM  
 Maximum Vacuum: 29" Hg/982mbar  
 Weight (approximate): 644lbs/293Kg  
 Operating Temperature: 160°F/71°C  
 Maximum Gas Inlet Temperature: 212°F/100°C  
 Maximum Noise Level (at 3 feet): 76dBA  
 Oil Capacity: 6Gal/23Ltr

Performance based on atmospheric pressure equal to 29.92" Hg - 1013mbarA.

### VMXP0160M

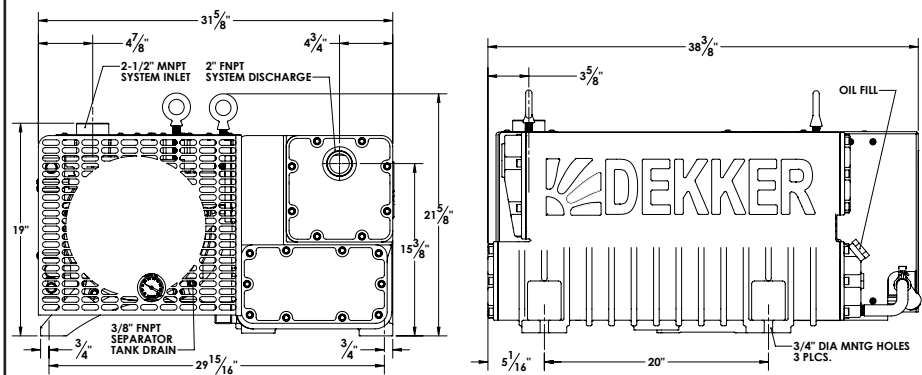

Information is subject to change without notice.

