

# SECO SV 1010-1040 C/D

Dry-running rotary vane vacuum pumps



VACUUM SOLUTIONS



## Compact

Direct-drive construction

## Reliable

Robust construction, proven performance, self-lubricating vanes, no operating fluids

## High performance

High performance Aerodur 274 Zirkon vanes, extended lifetime, extremely resistant to wear and humidity

Accessories, spare parts and options

- Inlet filter
- Vacuum regulation valve
- Non-return valve (inlet)
- Hose nipple


# SECO SV 1010-1040 C/D

Dry-running rotary vane vacuum pumps




VACUUM SOLUTIONS

Dimensional drawing

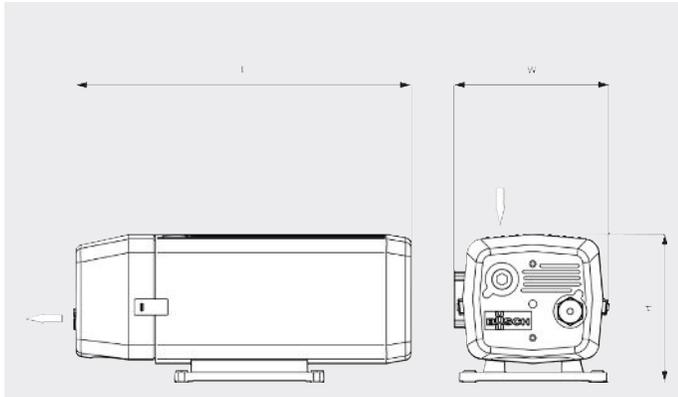

Pumping speed

Air at 70°F. Tolerance: ± 10%

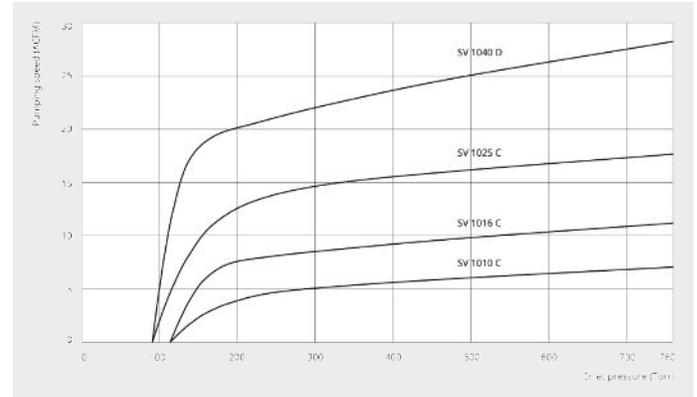

	SECO SV 1010 C	SECO SV 1016 C	SECO SV 1025 C	SECO SV 1040 D
Nominal pumping speed	7.1 ACFM	11.2 ACFM	17.7 ACFM	28.3 ACFM
Ultimate pressure	112.5 TORR	112.5 TORR	90 TORR	90 TORR
Nominal motor rating	0.5 HP	0.75 HP	1.2 HP	1.7 HP
Nominal motor speed	1800 RPM	1800 RPM	1800 RPM	1800 RPM
Noise level (ISO 2151)	62 dB(A)	63 dB(A)	66 dB(A)	70 dB(A)
Weight approx.	42 Lbs.	46 Lbs.	57 Lbs.	84 Lbs.
Dimensions (L x W x H)	16.3 x 9.9 x 8.9 inches	17.1 x 10.1 x 8.1 inches	19.5 x 11.3 x 9.8 inches	21.5 x 11.4 x 9.8 inches
Gas inlet / outlet	G ½" / G ½"	G ½" / G ½"	G ¾" / G ¾"	G ¾" / G ¾"

## DO YOU WANT TO KNOW MORE?

Get in touch with us directly!  
[info@buschusa.com](mailto:info@buschusa.com) or +1 757 463 7800



CONTACT FORM



CALL NOW