
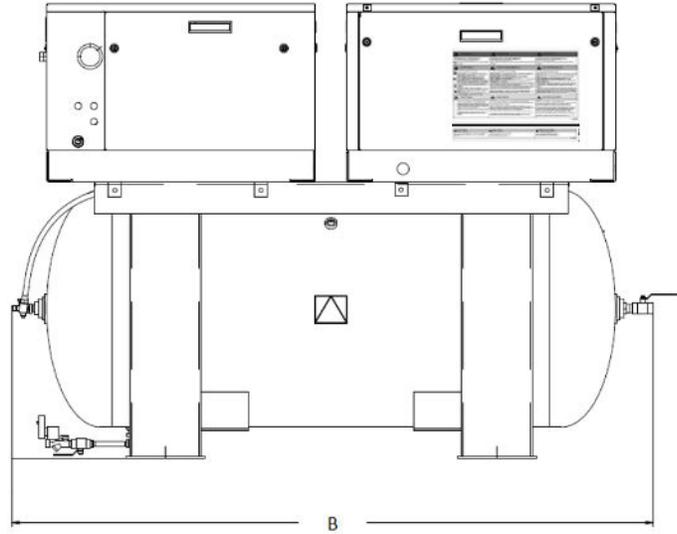


Dimensions				
Model	Dim. A	Dim. B	Dim. C	Outlet
STED0755	47"	82"	58"	0.75"
STED0505HP	47"	82"	58"	0.75"
STED10B5	47"	82"	58"	0.75"

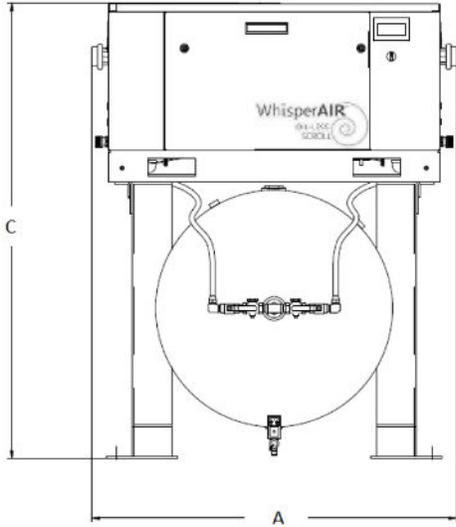

Notes:

- Allow a minimum of 36" in front of control panels for maintenance and ventilation. All other sides require 24" clearance.

Enclosed Scroll Air Compressor Systems											
Model	HP	Pump HP	SCFM @ 145 PSIG	Maximum Pressure (PSIG)	Tank Size (gal)	BTU/ Hr	dB(A) Level	System F.L.A.*			System Weight (lbs)
								208 V	230 V	460 V	
STED0755	7.5 (2)	46.2	46.2	116	200	38,200	68	40	36.6	18.4	1,410
STED0505HP	5 (2)		25	145	200	25,400	51	32	28.2	16.6	1,410
STED10B5	10 (2)	62.4	62.4	116	200	50,800	69	55	50	25	1,410

Notes:

- *Table specifications are defined at sea level conditions with all pumps in operation. Consult factory for installations above 3,000 ft.