
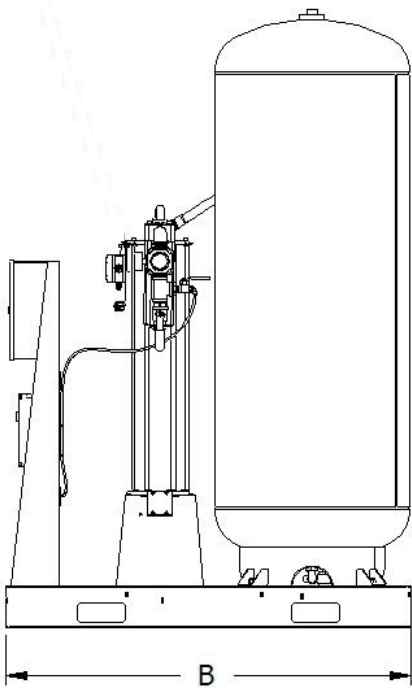
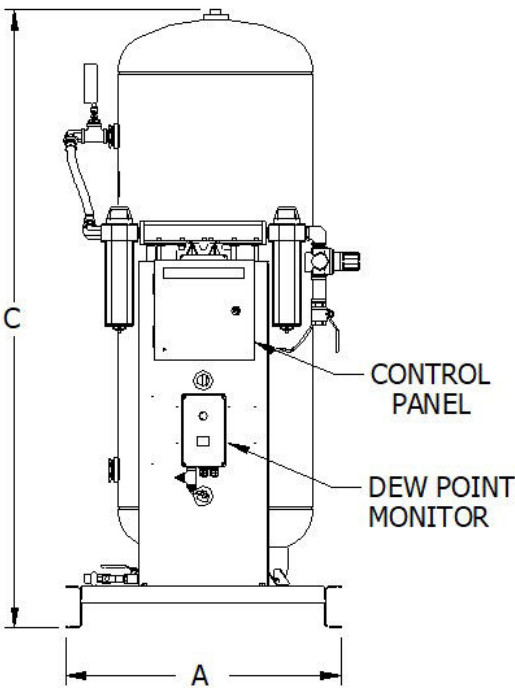


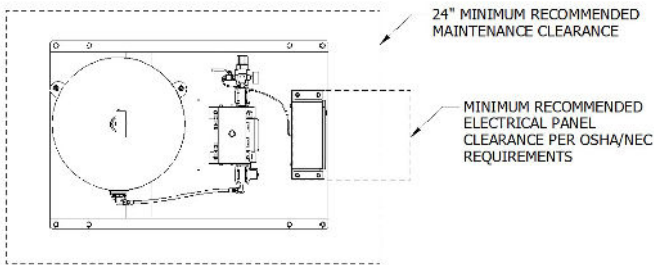

The desiccant dryer includes pre and after filters, regulator with gauge, safety valve and an isolation ball valve.

The tank is internally lined, rated for 200PSI, and shall be equipped with a pressure gauge, safety relief valve, and electronic automatic drain.

Base Model	Dimensions (inch)			Tank Size	Dryer Size SCFM	Inlet/Outlet	Weight (lbs)
	A	B	C				
TDD080030	34"	50"	63"	80	30	3/4"	450
TDD120045	34"	50"	77"	120	45	3/4"	585
TDD120060	34"	50"	77"	120	60	1"	601
TDD200100	45"	70"	84"	200	100	1"	1100
TDD240125	45"	70"	96"	240	125	1"	1400
TDD240200	45"	70"	96"	240	200	1-1/2"	1400

Notes:

- 1 - Dryer available on either 115V or 208/230/460V. Please specify voltage when ordering.
- 2 - Unit weights are approximate. Actual weights may vary.