
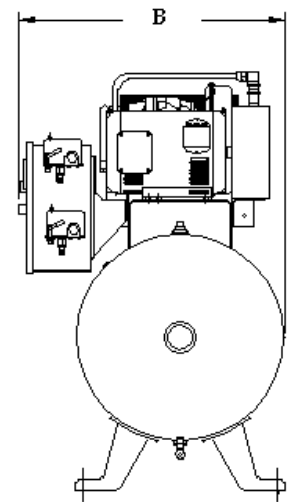
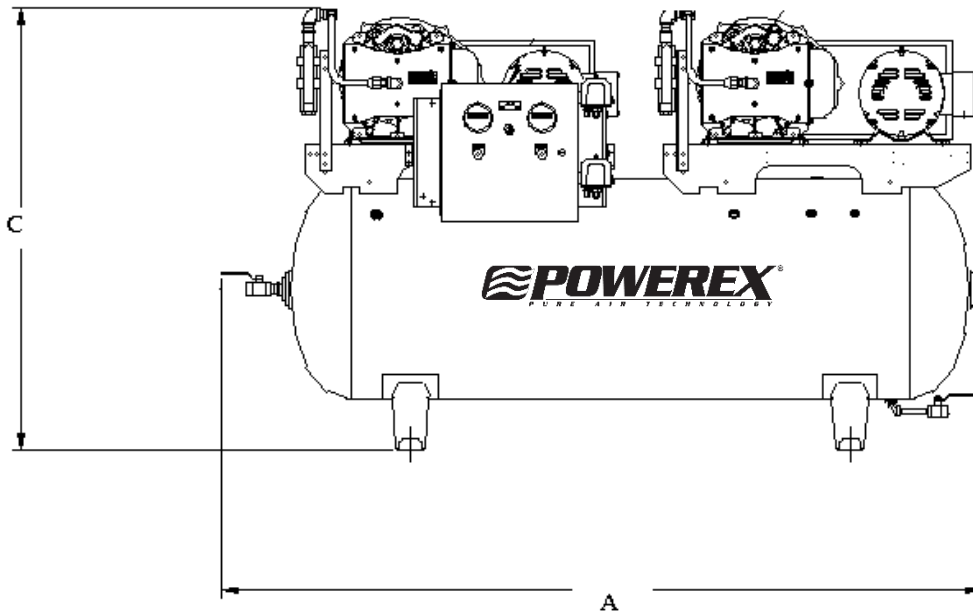


| Dimensions |        |        |        |        |
|------------|--------|--------|--------|--------|
| Model      | Dim. A | Dim. B | Dim. C | Outlet |
| STD0303    | 70"    | 26"    | 41"    | 1/2"   |
| STD1303    | 70"    | 26"    | 41"    | 1/2"   |
| STD0503    | 70"    | 26"    | 41"    | 1/2"   |
| STD1513    | 70"    | 26"    | 41"    | 1/2"   |
| STD0504    | 78"    | 28"    | 45"    | 1/2"   |
| STD1514    | 78"    | 28"    | 45"    | 1/2"   |

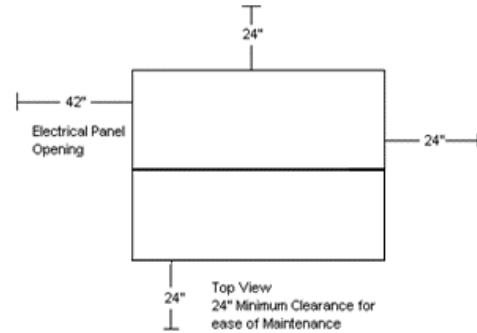

| Tankmount Scroll Air Compressors |                 |                      |                              |                                      |                 |        |             |               |      |      |                     |
|----------------------------------|-----------------|----------------------|------------------------------|--------------------------------------|-----------------|--------|-------------|---------------|------|------|---------------------|
| Model                            | Total System HP | Pump HP <sup>1</sup> | SCFM @ 100 PSIG <sup>3</sup> | Maximum Pressure (PSIG) <sup>3</sup> | Tank Size (gal) | BTU/Hr | dB(A) Level | System F.L.A. |      |      | System Weight (lbs) |
|                                  |                 |                      |                              |                                      |                 |        |             | 208V          | 230V | 460V |                     |
| STD0303                          | 6               | 3 (2)                | 17.6 (14.2)                  | 116 (145)                            | 80              | 15,270 | 75          | 10.6          | 9.6  | 4.8  | 570                 |
| STD1303                          | 6               | 3 (2)                | 17.6 (14.2)                  | 116 (145)                            | 80              | 15,270 | 75          | 34.1*         | 32.4 | -    | 570                 |
| STD0503                          | 10              | 5 (2)                | 30.4 (25.0)                  | 116 (145)                            | 80              | 25,450 | 75          | 28.4          | 25.9 | 12.9 | 610                 |
| STD1513                          | 10              | 5 (2)                | 30.4 (25.0)                  | 116 (145)                            | 80              | 25,450 | 75          | 48.4          | 46.4 | -    | 642                 |
| STD0504                          | 10              | 5 (2)                | 30.4 (25.0)                  | 116 (145)                            | 120             | 25,450 | 75          | 28.4          | 25.9 | 12.9 | 615                 |
| STD1514                          | 10              | 5 (2)                | 30.4 (25.0)                  | 116 (145)                            | 120             | 25,450 | 75          | 48.4          | 46.4 | -    | 726                 |

## Notes:

1 – Actual BHP is less than rated name plate. Contact Powerex for BHP rating.

2 – 3 Year Limited Warranty

3 – Systems are available with high pressure option. Values for system with high pressure option added are indicated in parentheses. "HP" is to be added to the end of the model number to designate high pressure.

\*System is usable at 208 volts, but should not be used at any value below that voltage.