ABB BALDOR RELIANCE

Customer information packet

EJMM3311T

7.5HP, 1770RPM, 3PH, 60HZ, 213JM, 3734M, OPSB
C.A.S.E.I. Air systems
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/16/2026 12:17:07 PM

Specifications

Enclosure	OPSB
Frame	213JM
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	7.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
	460.0 V @ 60 HZ
Agency Approvals	CSA
	CSA EEV
	NEMA PREMIUM
	UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	9.800 A @ 460.0 V
	20.600 A @ 208.0 V
	19.600 A @ 230.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None


Part Detail

Revision	E
Type	AC
Mech. spec.	37F784
Base	
Status	PRD/A
Elec. spec.	37WGL863
Layout	37LYF784
Eff. date	06-11-2024
CD Diagram	CD0005
Poles	04
Leads	9#14
Proprietary	False
Created date	01-29-2021


Heater Indicator	No Heater
High Voltage Full Load Amps	9.8 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3734M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	18.19 IN
Power Factor	79
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Tapped & Key
Rodent Screen	Included
Service Factor	1.15
Shaft Diameter	0.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1770 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None


Nameplate


NP3553LUA									
CAT.NO.	EJMM3311T								
SPEC.	37F784L863G1								
HP	7.5								
VOLTS	230/460								
AMPS	19.6/9.8								
RPM	1770								
FRAME	213JM	**HZ**	60		**PH**	3			
SF	1.15	**CODE**	J	**DES**	A	**CLASS**	F		
NEMA NOM. EFF	91	**PF**	79						
RATING	40C AMB-CONT								
CC	010A								
ENCL	OPSB	**SN**							
DE	6309	**ODE**	6206						
VPWM INVERTER READY									
CT30-60(2:1) VT3-60(20:1)									
USABLE AT	50HZ 7.5HP 190/380V 23.2/11.6A								SF1.0

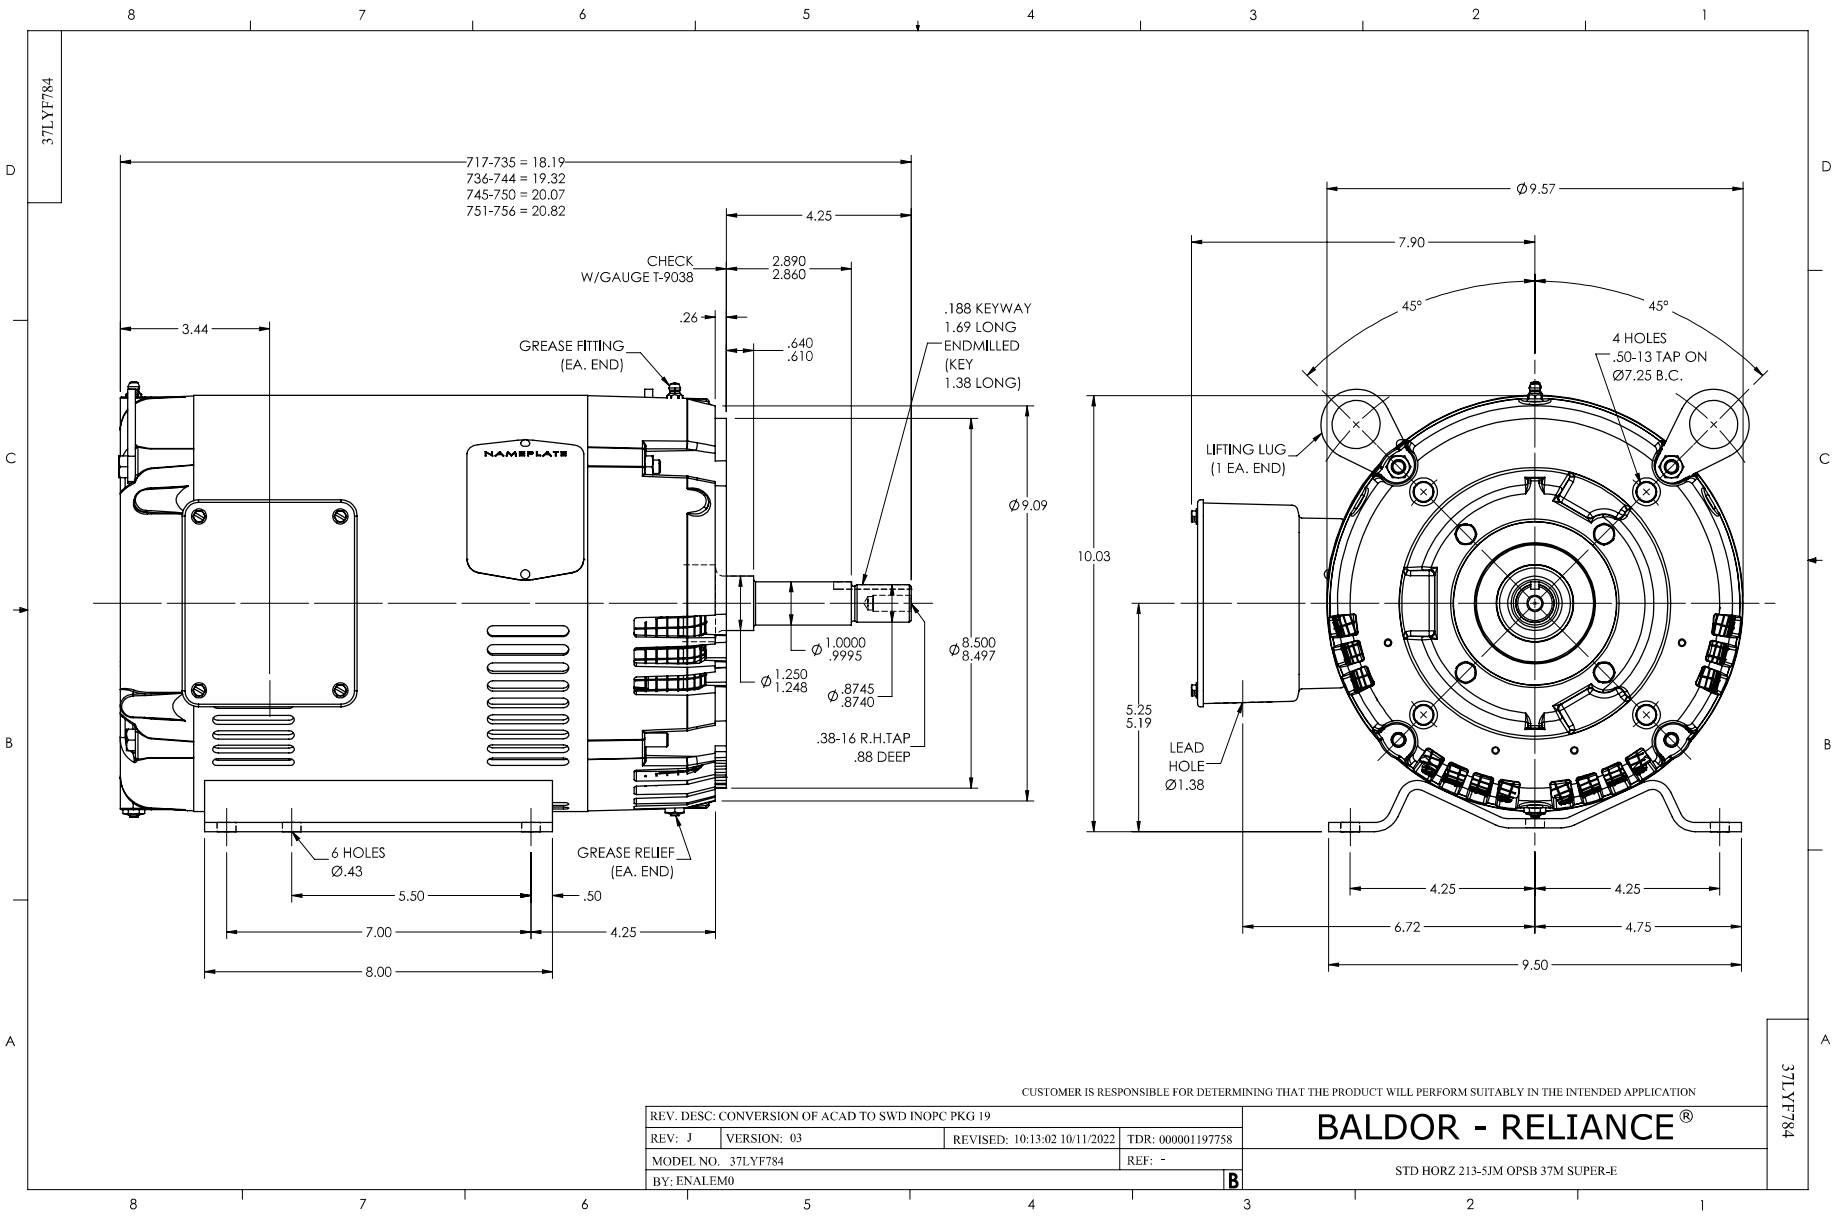
37LYF784
717-735 = 18.19
736-744 = 19.32
745-750 = 20.07
751-756 = 20.82
4.25
CHECK
W/GAUGE T-9038
2.890
2.860
.26
.640
.610
.188 KEYWAY
1.69 LONG
ENDMILLED
(KEY
1.38 LONG)
3.44
GREASE FITTING
(EA. END)
NAMEPLATE
Ø9.09
Ø 1.0000
.9995
Ø 1.250
1.248
Ø .8745
.8740
Ø8.500
8.497
.38-16 R.H.TAP
.88 DEEP
6 HOLES
Ø.43
GREASE RELIEF
(EA. END)
5.50
.50
7.00
4.25
8.00
Ø9.57
7.90
45°
45°
4 HOLES
.50-13 TAP ON
Ø7.25 B.C.
LIFTING LUG
(1 EA. END)
10.03
5.25
5.19
LEAD
HOLE
Ø1.38
4.25
4.25
6.72
4.75
9.50
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: CONVERSION OF ACAD TO SWD INOPC PKG 19
REV: J
VERSION: 03
REVISED: 10:13:02 10/11/2022
TDR: 000001197758
MODEL NO. 37LYF784
REF: -
BY: ENALEM0
B
BALDOR - RELIANCE®
STD HORZ 213-5JM OPSB 37M SUPER-E
37LYF784

CD0005

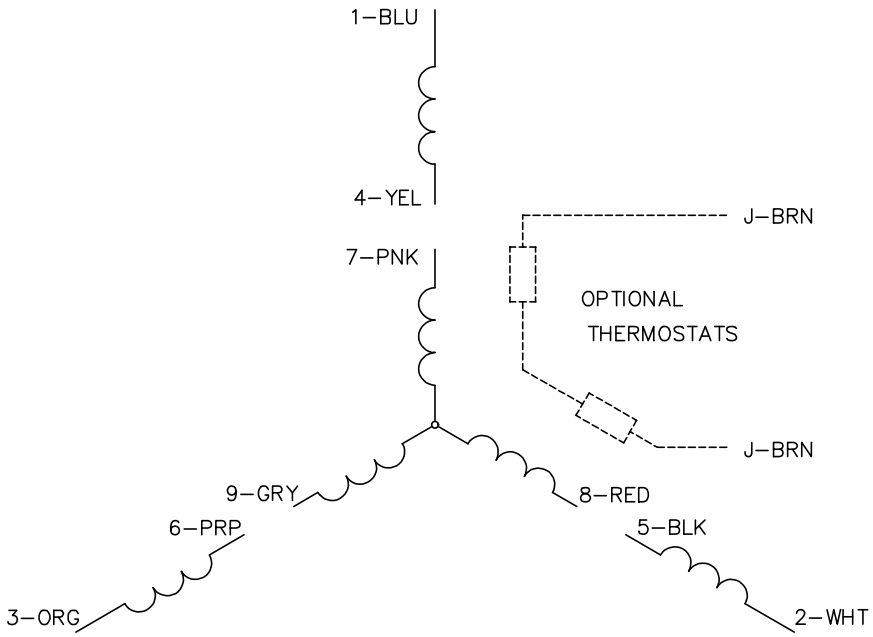

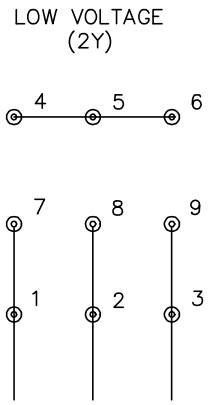

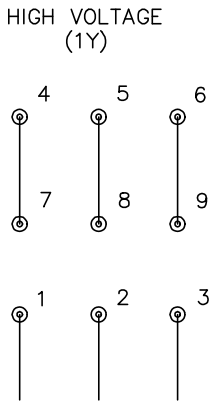

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS