


# Laboratory Open Scroll Pentaplex with Premium Controls

| Dimensions | | | | | |
|---|---|---|---|---|---|
| Model | Dim. A | Dim. B | Dim. C | Inlet | Outlet |
| LSP15A5 | 73” | 85” | 83” | 2” | 2” |
| LSP15A6 | 73” | 85” | 95” | 2” | 2” |

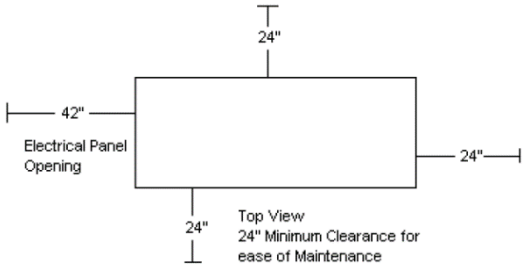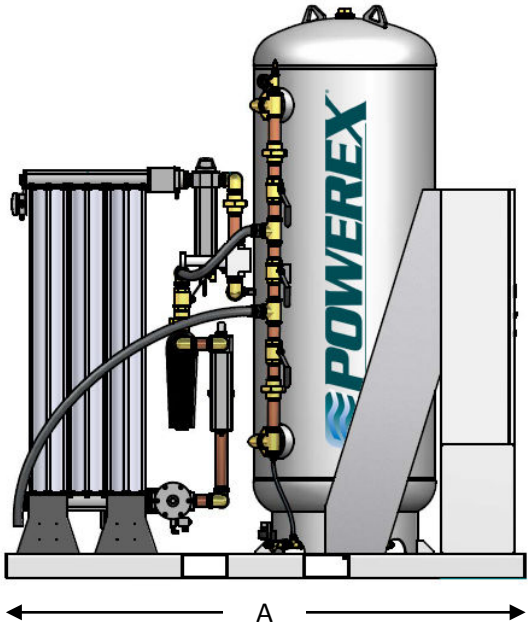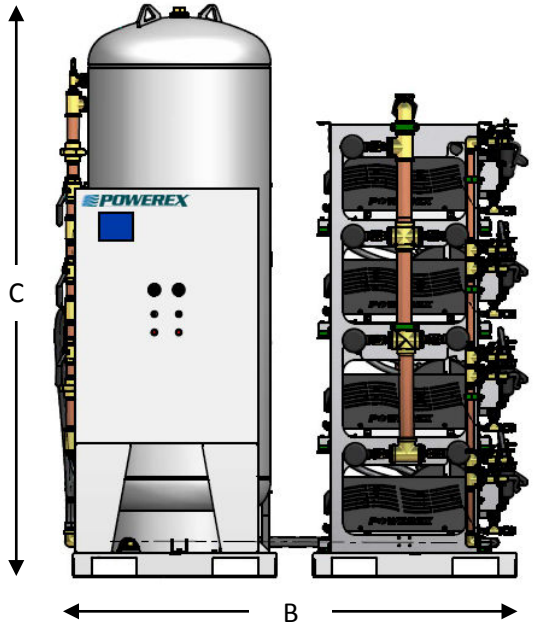


| Laboratory Open Scroll Pentaplex with Premium Controls | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Model | HP | SCFM @ 145 psig(1) | Tank Size (gal) | BTU/Hr (1) | dB(A) Level(1) | System F.L.A. (1) | | | System Weight (lbs) |
| | | | | | | 208V | 230V | 460V | |
| LSP15A5 | 15 (5) | 187.5 | 200 | 183000 | 83 | 212 | 192.5 | 97 | 6800 |
| LSP15A6 | 15 (5) | 187.5 | 240 | 183000 | 83 | 212 | 192.5 | 97 | 6850 |

Notes:

1 – SCFM values, BTU/Hr levels, and dB(A) are shown with all pumps running.

2 – Powerex recommends using performance ratings in SCFM (Standard Cubic Feet per Minute) when sizing laboratory air systems.

3 – 3 Year Limited Warranty.

5 – Drawing is representative and not exact.