


Dimensions											
MODEL	DIM A	DIM A1	DIM B	DIM C	DIM D	DIM D1	DIM E	DIM E1	DIM F	OPTIONAL INLET 4X	OUTLET
LSED3006	38.4"	39.0"	61.8"	61.6"	83.0"	86.2"	32.0"	39.1"	96.2"	1 ½"	1 ½"
LSED4006	38.4"	39.0"	61.8"	61.6"	83.0"	84.5"	32.0"	39.4"	96.2"	1 ½"	1 ½"

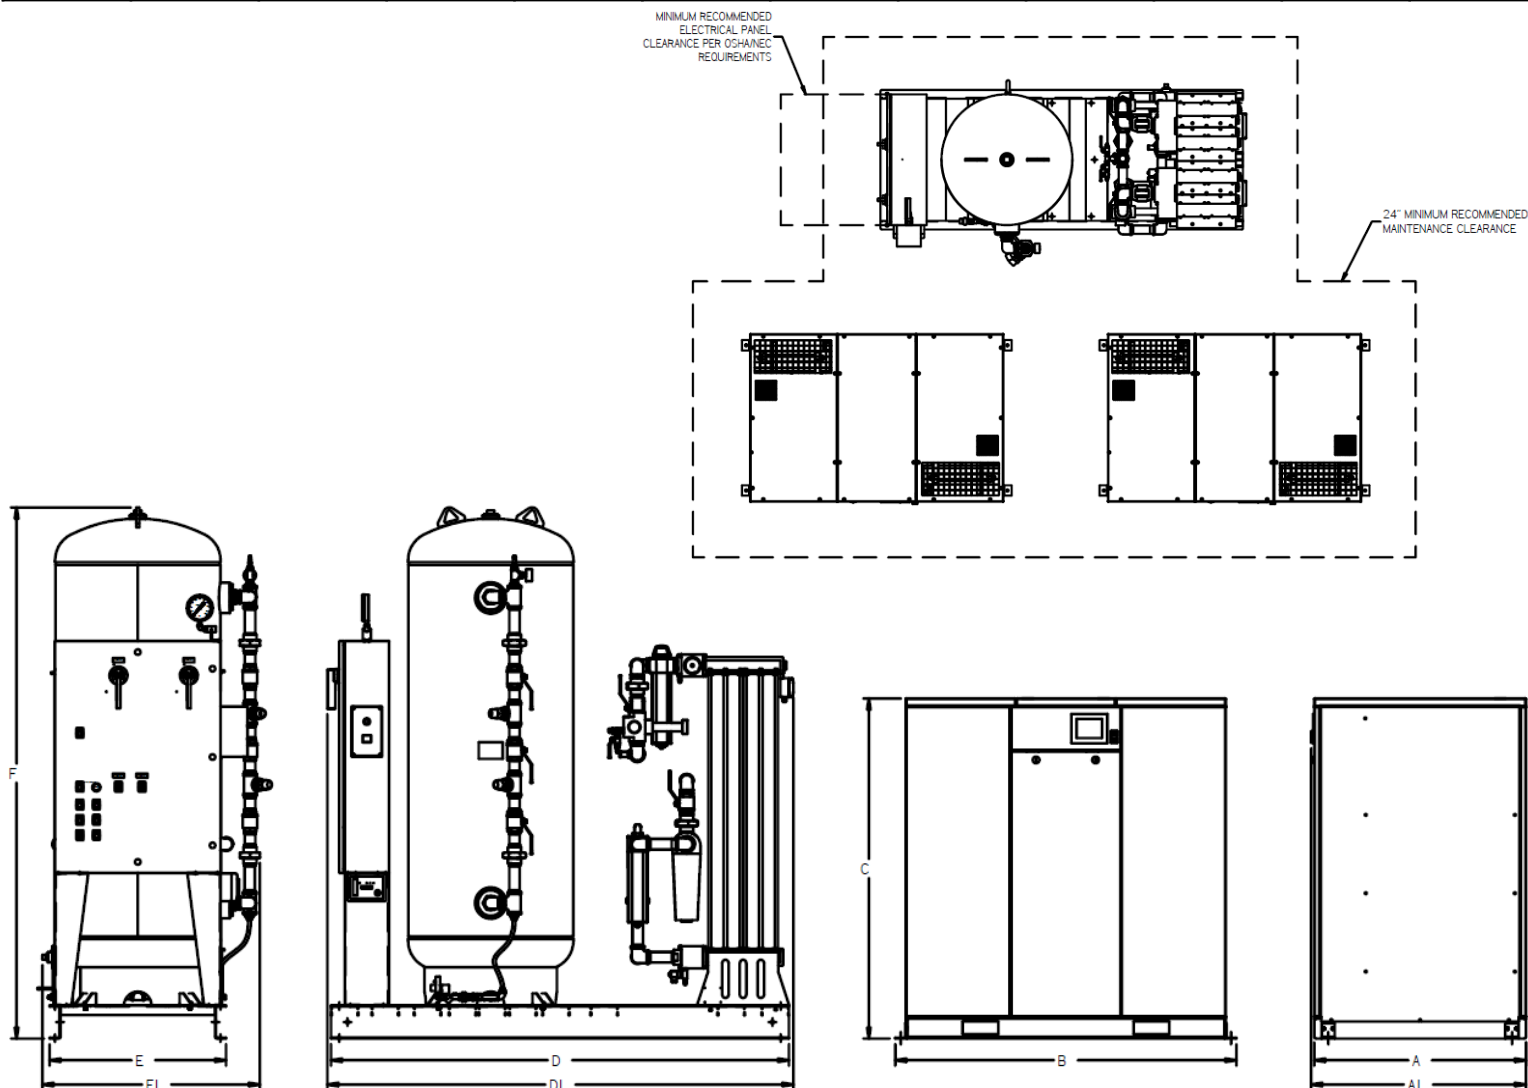

Laboratory Enclosed Scroll Compressor System									
Model	HP	SCFM @ 145 PSIG ^(1,3)	Tank Size (gal)	BTU/Hr ⁽²⁾	dB(A) Level ⁽⁴⁾	System F.L.A.			System Weight (lbs)
						208V	230V	460V	
LSED3006HP-AES-SPL	30 (2)	150 Total	240	102,000	61	174.8	158	79.9	4900
LSED4006	40 (2)	182.4	240	153,000	62	232.4	210	105.8	6050

Notes: **SEH3007HP 30HP Enclosed Scroll 75 SCFM @ 145 PSIG EACH**

- 1 – SCFM values @ 100 PSIG are shown with one pump in reserve per compressor column
- 2 – BTU/Hr Levels are shown with reserve compressor(s) on standby
- 3 – Powerex recommends using performance ratings in SCFM (Standard Cubic Feet per Minute) when sizing laboratory air systems.
- 4 – dB(A) is shown with all pumps running
- 5 – 3 Year Limited Warranty